




ULTRAMAX A/S 2.0

Size	PART#	LI/SR	L.R.	TD	OD	SW	RW	UTQG	MAX LOAD
					32/in.	in.	in.	in.	lbs@psi (1X)
175/65R14	20645	86T	XL	10	23.0	7.0	5.0	420 A A	1168@50
175/70R14	20640	84T		10	23.7	7.0	5.0	420 A A	1102@44
185/65R14	20629	86H		10	23.5	7.4	5.5	420 A A	1168@44
195/70R14	20637	91T		10	24.8	7.9	6.0	420 A A	1356@44
175/55R15	20660	77H		10	22.6	7.2	5.5	420 A A	908@44
175/65R15	20653	84H		10	24.0	7.0	5.0	420 A A	1102@44
185/55R15	20639	82V		10	23.0	7.6	6.0	420 A A	1047@44
185/60R15	20627	88H	XL	10	23.7	7.4	5.5	420 A A	1235@50
185/65R15	20621	92H	XL	10	24.4	7.4	5.5	420 A A	1389@50
195/60R15	20623	88H		10	24.2	7.9	6.0	420 A A	1235@44
195/65R15	20614	91H		10	25.0	7.9	6.0	420 A A	1356@44
205/60R15	20646	95H	XL	10	24.7	8.2	6.0	420 A A	1521@50
205/65R15	20624	94H		10	25.5	8.2	6.0	420 A A	1477@44
205/70R15	20635	96T		10	26.3	8.2	6.0	420 A A	1565@44
215/70R15	20628	98T		10	26.9	8.7	6.5	420 A A	1653@44
195/50R16	20654	84V		10	23.7	7.9	6.0	420 A A	1102@44
195/55R16	20652	87H		10	24.4	7.9	6.0	420 A A	1201@44
205/50R16	20648	87H		10	24.1	8.4	6.5	420 A A	1201@44
205/55R16	20611	91H		10	24.9	8.4	6.5	420 A A	1356@44
205/60R16	20620	92H		10	25.7	8.2	6.0	420 A A	1389@44
205/65R16	20619	95H		10	26.5	8.2	6.0	420 A A	1521@44
215/55R16	20622	97H	XL	10	25.3	8.9	7.0	420 A A	1609@50
215/60R16	20613	95H		10	26.1	8.7	6.5	420 A A	1521@44
215/65R16	20626	98T		10	27.0	8.7	6.5	420 A A	1653@44
225/60R16	20617	98H		10	26.6	9.0	6.5	420 A A	1653@44
225/65R16	20636	100H		10	27.5	9.0	6.5	420 A A	1764@44
235/60R16	20659	100V		10	27.1	9.4	7.0	420 A A	1764@44
235/65R16	20647	103T		10	28.0	9.4	7.0	420 A A	1929@44
205/50R17	20641	89V		10	25.1	8.4	6.5	420 A A	1728@44
215/45R17	20649	87W		10	24.6	8.4	7.0	420 A A	1201@44
215/50R17	20642	91V		10	25.5	8.9	7.0	420 A A	1356@44
215/55R17	20612	94V		10	26.3	8.9	7.0	420 A A	1477@44
215/60R17	20632	96T		10	27.2	8.7	6.5	420 A A	1565@44
215/65R17	20634	99T		10	28.0	8.7	6.5	420 A A	1709@44
225/45R17	20631	91V		10	25.0	8.9	7.5	420 A A	1356@44
225/50R17	20616	94V		10	25.9	9.2	7.0	420 A A	1477@44
225/55R17	20618	97V		10	26.8	9.2	7.0	420 A A	1609@44
225/60R17	20625	99H		10	27.6	9.0	6.5	420 A A	1709@44
225/65R17	10176	102T		10	28.5	9.0	6.5	420 A A	1874@44
235/45R17	20651	97W	XL	10	25.4	9.3	8.0	420 A A	1609@50
235/55R17	20644	99V		10	27.2	9.6	7.5	420 A A	1709@44
225/40R18	20658	92W	XL	10	25.1	9.1	8.0	420 A A	1389@50
225/50R18	20643	95H		10	26.9	9.2	7.0	420 A A	1521@44
235/45R18	20650	94V		10	26.3	9.3	8.0	420 A A	1477@44
235/50R18	20638	97V		10	27.3	9.6	7.5	420 A A	1609@44
235/55R18	20630	100V		10	28.1	9.6	7.5	420 A A	1764@44
235/60R18	20633	103H		10	29.1	9.4	7.0	420 A A	1929@44
245/40R18	20657	97W	XL	10	25.7	9.8	8.5	420 A A	1609@50
245/45R18	20656	100W	XL	10	26.7	9.6	8.0	420 A A	1764@50
235/55R19	20655	105V	XL	10	29.2	9.6	7.5	420 A A	2039@50

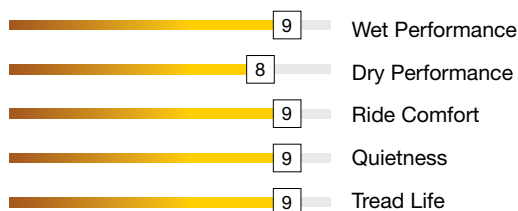

60,000 Mile Limited Treadwear Warranty

The ULTRAMAX A/S 2.0 is an exceptional all-season tire with the perfect balance of comfort and performance. Full-size offering with needed speed ratings from T to W for today's vehicles. Its design features four broad circumferential grooves, ensuring excellent wet traction. The wide footprint and notched center rib enhance stability and traction. ULTRAMAX A/S 2.0 guarantees both comfort and performance, coupled with a 60,000-mile tread life, ensuring peace of mind in all seasons.

TIRE FEATURES

- **BALANCED VARIABLE PITCH TREAD DESIGN:** Reduces road noise and assures a quiet comfortable cabin.
- **FULL-SIPED INNER TREAD BLOCKS:** Efficient water evacuation design promotes enhanced wet performance.
- **CENTER RIB WITH ANGLED SIPES:** Enhances traction while improving straight-line stability.

